


innovaphone IP200 / IP230 / IP240



DE Im Ruhezustand
 EN In idle state
 FR En veille
 IT In riposo
 NL In standby-stand
 ES Modo inactivo
 PT No descanso
 DK I hviletilstand
 SE I vänteläge
 FI Joutotilassa
 NO I hviletilstand
 PL W stanie spoczynku
 CZ V klidovém stavu
 RU в режиме покоя

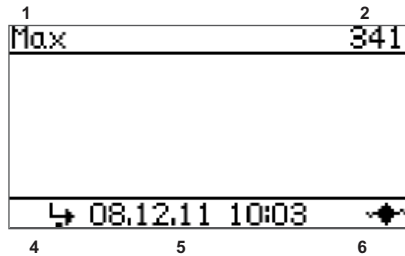

DE Während des Gesprächs
 EN During call
 FR Pendant la communication
 IT In conversazione
 NL Tijdens gesprek
 ES Durante la llamada
 PT Durante uma chamada
 DK Under opkaldet
 SE Under pågående samtal
 FI Puhelun aikana
 NO Under samtalen
 PL W trakcie rozmowy
 CZ Během hovoru
 RU во время вызова

CE Version: 001-2012 (6450544)

EN Short user guide innovaphone IP200 / IP230 / IP240

EN Icons	Description
	Speaker on
	Microphone on (hands-free)
	Call diversion activated
	Phone locked, can only be unlocked with PIN
	Handset active (handset off-hook)
	Headset on
	Encrypted telephone connection
	Registration successful
	Registration failed

Key functions

Key	In idle state	During call
Menu key 	Opens the menu and leaves the menu confirming changes made	Sets up conference with two active calls
Ok key 	Confirms the current selection or entry	
Enter 	Confirms the current selection or entry	
R key 	Displays in-bound call list	Sets up a consultation call, switches between two calls
Redial 	Displays out-bound call list	Forwards the incoming call or active call
Speaker 	Prepares call, picking up a call in hands-free mode	Listen-in, switch to hands-free mode
Microphone 	Silences telephone, switches ringing tone off	Mute / mute key switches microphone off
Disconnect 	Exit menu, return to home screen	Terminates call
Delete (IP240) 	Deletes the character to the right of the cursor	
Delete 	Deletes last character in editor mode	
Backspace 	Deletes last character in editor mode	
Escape 	One level back in menu without saving settings	Terminates call
Stop 	One level back in menu without saving settings	Terminates call

Display components (see numbering on illustrations)

- 1 Name of active registration
- 2 Own extension number
- 3 Contact field
- 4 Display icons 1
- 5 Date and time
- 6 Display icons 2
- 7 Current connection time

Actions for incoming calls

Accept call: Pick up handset, press to pick up call in hands-free mode.

Reject call: Press .

Call diversion: Press before accepting the call, enter telephone number for the call diversion and confirm by pressing again.

Actions in idle state

Dialling: Enter telephone number; to dial by name, long press to change to characters and enter name, use arrow keys to select desired name if necessary, pick up handset to initiate call.

Call completion on missed call: Press , if necessary press arrow keys to select desired call, pick up handset to initiate call.

Re-dial: Press , select entry with arrow keys if necessary and pick up handset to initiate call.

Send message: Enter telephone number or name, press , select send message and enter the desired text, send by pressing .

Set call diversion: Press , select user setup, select call diversion by entering the target number under the required condition. Press twice to save the setting.

Set presence: Press , select user setup and presence. Set required activity and add note as necessary.

Actions during call

Change to hands-free: Keep pressed and hang up.

Terminate hands-free: Pick up handset or terminate call by pressing .

Consultation: Press , select number or name for consultation call. Terminate consultation with and return to initial call.

Switch between calls: Press and set up second call. Double press to switch between calls. Press to terminate calls.

Transfer: Press and set up second call. Hang up to connect the two calls to each other.

Conference: Set up two calls using the key and switch to conference with . Press again to separate calls or hang up to terminate.

Quick transfer: Press and dial target number required. If you hang up before the call is initiated, the caller will hear the ring-tone until the person being called picks up the call.

Blind transfer: Press and set up second call. Press once more to connect calls together without the callers being put in the wait queue.

Actions when initiating a call

Call completion on busy subscriber: Initiate call, press when you hear busy tone or call waiting signal, then select recall. The telephone will indicate when the subscriber is available again.

Call completion on no reply: Initiate call, press while hearing the ring tone, and select recall. The telephone will indicate when the subscriber is active again.